



**ArmaTrac**<sup>®</sup>




# 904e

- 12 forward, 12 reverse full synchromesh transmission with power shift...
- Forward / Reverse Shuttle...
- Plow depth adjustment with "Automatic Hitch Control" system...
- 4 hydraulic remote valves...
- Rotative type top hitch...
- High capacity electronic/hydraulic lift system...
- Independent and synchronized PTO shaft...
- Digital Air Condition System...
- 110 liter capacity fuel tank...
- Ergonomic luxury cab with Hi-Visibility for an unparalleled view, dust & sound proof...



**NEW  
MODEL**

**Armed well for even the toughest job.  
Anywhere on earth.**

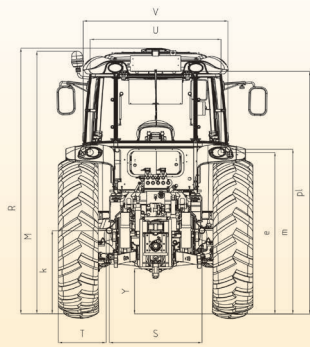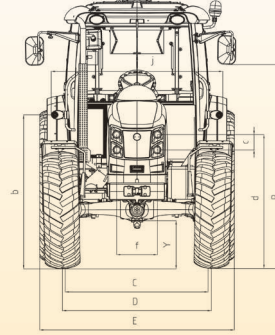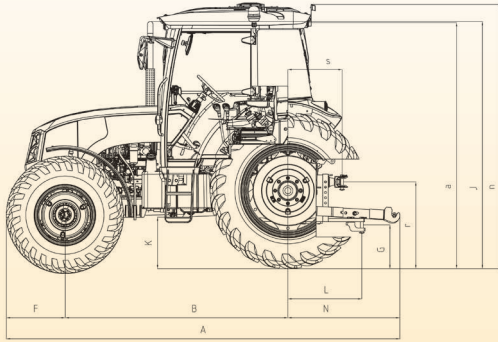

## ENGINE

Emissions  
Model  
Maximum Power  
PTO Power  
Max Torque  
Torque Reserve  
Rated Speed  
Number of Cylinders - Cubic Capacity  
Rate of Compression  
Aspiration  
Air Filter  
Bore x Stroke

## CLUTCH

Type  
Diameter  
Lining

## TRANSMISSION

Type  
Gear Number  
Gears Forward-Reverse  
Shifting  
Speed

## PTO SHAFT

Type  
Speed

## HYDRAULICS

Type  
Three Point Linkage  
Control - Functions  
Operating Pressure  
Pump Capacity (lt/min)  
Hydraulic Valves (Number)

## OTHER

Drive System  
Operating Space  
Steering  
Service Brake  
Parking Brake  
Front Axle 2WD  
Front Axle 4WD  
Rear Axle

## STANDART BALLAST

Front Ballast  
Rear Ballast (Each Wheel)

## DIMENSIONS

A-Length  
B-Wheelbase  
C-Front Track Width  
D-Rear Track Width  
E-Width  
F-Ground Clearence  
G-Ground Clearence With Trailer  
K-Distance From Muffer  
L-Distance From Front to Front Axle Axis  
M-Maximum Height  
N-Distance From Lowerlink Ends to Rear Axle Axis  
Standard Front Tyre  
Standard Rear Tyre  
Unballasted Tractor Weight  
Total Tractor Weight

## ROPS

Frame  
Cabin

## ARMATRAC 904e

Stage III-A (Tier 3)  
PERKINS/1104-44TA T3055  
92.5Hp (68 kW) @ 2200rpm  
85% of Engine Power  
393Nm @ 1400rpm  
33.2%  
2400  
4,4 Liters/4  
18,2:1  
Intercooler and Turbocharger  
Dry type with Pre Internal Filter (with indicator)  
105 x 127 mm

Dry Type / Mechanical Control  
11.5" (292mm)  
Cerametalic

Carraro 506-Up  
12 Forward + 12 Rear - (FxR)x(1x2x3)x4  
Mechanical  
1-2-3-4, Forward-Reverse, Fully Synchromeshes  
1,5 - 35.2 @ 2400 rpm

Mechanical, Hand Lever Operated  
540 - 540e

Mechanical With Draft  
Compatibility with CAT 2  
Mechanical Control, Position, Draft and Mixed  
180  
48.5 @ 2400 rpm  
4 Valves, with Hand Lever Control

4WD  
Cabin/Frame  
Hydrostatic  
Hydraulic Controlled Five Friction Disks with Oil Bath at Each Wheel (5x2)  
Each Rear Wheel, Mechanically Controlled  
-  
Carraro  
Carraro 506-Up

10x30 kg  
3x50 kg

4210 mm  
2330 mm  
1500-1900 mm  
1500-1900 mm  
1990 mm  
520 mm  
510 mm  
2580 mm  
825 mm  
2695 mm  
960 mm  
12,4x24  
18,4x30  
3440 kg  
4040 kg

Yes  
Yes

The manufacturer, Erkunt Traktör Sanayii A.Ş., realizes continual improvement policy. Therefore, it reserves the right to modify the technical characteristics indicated above without any notice.

**Erkunt Traktör Sanayii A.Ş.**

Organize Sanayi Bölgesi Batı Hun Cad. No:2 Sincan 06935 Ankara - TR  
P: +90 312 267 44 88 (Pbx) F: +90 312 267 44 91  
info@armatrac.com - www.armatrac.com