
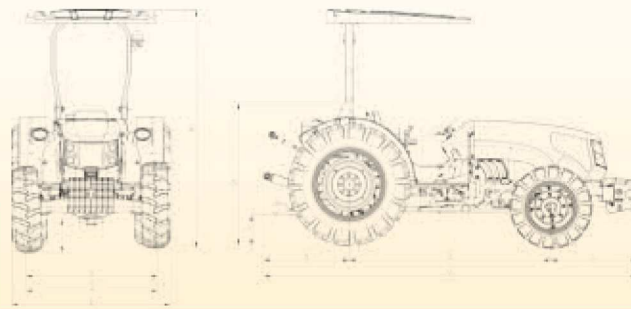


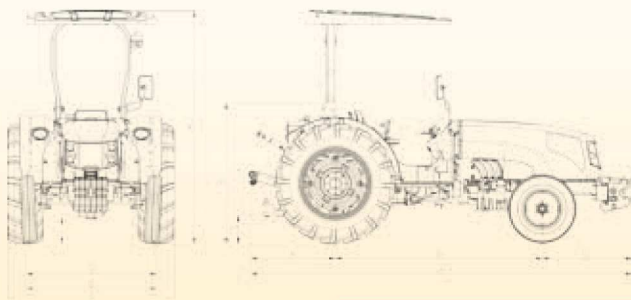

ENGINE

Emissions
Model
Power
PTO Power
Rated Speed
Number of Cylinders - Cubic Capacity
Aspiration
Bore x Stroke
Max Torque
Torque Reserve

CLUTCH

Type
Diameter
Lining

TRANSMISSION

Type
Shifting
Gears Forward/Reverse
Speed

PTO SHAFT

Type
Speed

HYDRAULICS

Type
Three Point Linkage
Control
Lift Capacity
Operating Pressure
Pump Capacity
Remote Valves

OTHER

Drive System
Operating Space
Steering
Service Brake
Parking Brake
Front Axle 2WD
Front Axle 4WD
Rear Axle

STANDART BALLAST

Front Ballast
Rear Ballast (Each Wheel)

DIMENSIONS

A-Length
B-Wheelbase
C-Front Track Width
D-Rear Track Width
E-Width
F-Ground Clearance
G-Ground Clearance With Trailer
H-Folded ROPS Height
K-Distance From Muffler
L-Distance From Front to Front Axle Axis
M-Maximum Height
N-Distance From Lowerlink Ends to Rear Axle Axis
Standart Front Tyre
Standart Rear Tyre
Unballasted Tractor Weight

ArmaTrac 802.4 FG | ArmaTrac 804.4 FG

Tier3a
Perkins 1104d-44t
55.5 KW
47 KW
2350 rpm
4 Cylinders/ 4.4 Liters
Turbo
105 mm X 127 mm
307 Nm
27%

Dry, Dual, Mechanical Control
280
Serametalic

ZF T-537
1-2-3-4 Synchronised; F/R Range Non Synchronised
16 Forward / 8 Reverse
1.92 - 39.7 km/hr

Independent
540/540e rpm 540-1000 rpm (Optional)

Mechanical With Draft
Cat. 2 Linkage With Ball Ends
Position, Draft and Mixed
2400 kg 2800 kg (Optional)
180 Mpa
48.5 lt/min
Standart 2 Set Valves

2 WD / 4 WD
Platform
Hydrostatic
Mechanical, Oil-Cooled, 4 Palte Disc Brakes
Mechanic
8° Oscillation
52° Turning Angle LSD
Planetary Gear System, Mechanical Diferantial Locking

4 X 10 kg 8 X 10 kg
2 X 40 kg

4140 mm	4140 mm
2220 mm	2250 mm
1300 mm	1350 mm
1300 mm	1300 mm
1680 mm	1680 mm
395 mm	285 mm
260 mm	260 mm
1550 mm	1550 mm
960 mm	915 mm
2530 mm	2530 mm
2530 mm	2530 mm
6.50 - 16	260/70 R20
380/70 R28	380/70 R28
2500 kg	2850 kg

ROPS

Platform
Cabin

Yes
No